


Pancake Machine



<i>Model</i>	<i>Product</i>	<i>Output/hour</i>	<i>Length</i>	<i>Width</i>	<i>Height</i>	<i>Weight</i>
500 PS	4 ½ inch Pancakes	9,220	31 feet	75 inches	103 inches	26,940 lbs
500 PSM	2 ½ inch Pancakes	33,651	31 feet	75 inches	103 inches	27,680 lbs
500 PSX	6 inch Pancakes	7,010	31 feet	75 inches	103 inches	26,720 lbs
1000 PS	4 ½ inch Pancakes	16,750	43 feet	87 inches	103 inches	34,560 lbs
1000 PSM	2 ½ inch Pancakes	54,114	43 feet	87 inches	103 inches	35,390 lbs
1000 PSX	6 inch Pancakes	11,520	43 feet	87 inches	103 inches	34,280 lbs
1500 PS	4 ½ inch Pancakes	30,400	49 feet	117 inches	103 inches	45,230 lbs
1500 PSM	2 ½ inch Pancakes	123,082	49 feet	117 inches	103 inches	46,150 lbs
1500 PSX	6 inch Pancakes	21,900	49 feet	117 inches	103 inches	44,910 lbs

- Pancake cooker griddle plates are almost one inch thick and require no oil to aid in product release.
- Servo controlled batter depositing is accurate to +or- 0.3 gm and easily removed from the griddle for cleaning.
- A tri servo axis controlled “gentle handling flipper” can be tuned on the fly for those difficult to flip products.
- The griddle plates are continuously cleaned by a high temperature brush system located under the griddle.
- Depositor, brush, guards, cladding, control panel and exhaust hood are made from 304 or 316 stainless steel.
- The pancake maker is controlled by an Allen Bradley PLC/Servo system and interfaced with a panel view 1000.
- All our griddles have a lockable recipe control system, no more manual set point entry or unauthorized changes.
- The pancake cooker has automatic ignition, temperature and flame monitoring system for trouble free operation.
- TSA is committed to continual improvement providing our customers with simple, efficient and reliable systems.

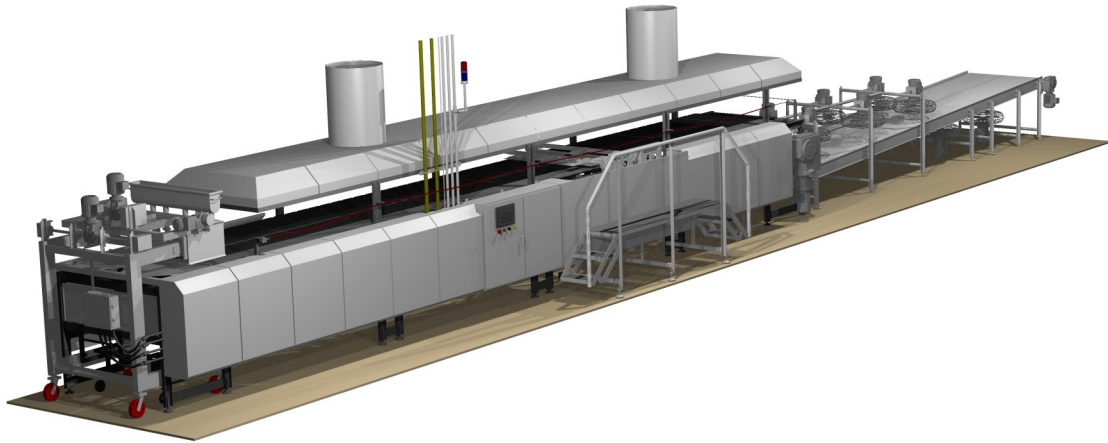

**TSA GRIDDLE
SYSTEMS**

Your Partner in Productivity

Proud builders of the world's highest output griddles.